MODELS		S0607EII (S1932EII)		S0608EII	S0808EII (S2632EII)		S0812EII (S2646EII)		S1012EII (S3246EII)		S1212EII (S4046EII)		S1413EII (S4650EII)	
Measurements		Metric	US	Metric	Metric	US	Metric	US	Metric	US	Metric	US	Metric	US
Work Height Max.	(m/ft)	7.8	25.6	7.9	9.8/8	32.2/26.2	10	32.8	12	39.4	14/9.5	46/31.17	15.8/10	51.8/32.8
Ⓐ Platform Height-Raised	(m/ft)	5.8	19	5.9	7.8/6	25.6/19.7	8	26.2	10	32.8	12/7.56	39.4/24.8	13.8/8	45.3/26.2
Ⓑ Platform Length	(m/ft)	1.64	5.36	2.26	2.26	7.4	2.26	7.4	2.26	7.4	2.26	7.4	2.64	8.7
Ⓒ Platform Width	(m/ft)	0.73	2.4	0.79	0.79	2.59	1.12	3.68	1.12	3.68	1.12	3.68	1.12	3.67
Ⓓ Overall Length	(m/ft)	1.86/1.77※	6.1/5.8※	2.44	2.44	8	2.49	8.17	2.49	8.17	2.49	8.17	2.8	9.2
Ⓔ Overall Width	(m/ft)	0.79	2.59	0.83	0.83	2.7	1.18	3.87	1.18	3.87	1.18	3.87	1.3	4.3
Ⓕ Overall Height-Guardrails Up	(m/ft)	2.16	7.07	2.15	2.28	7.48	2.36	7.74	2.49	8.17	2.63	8.63	2.74	9
Ⓖ Overall Height-Guardrails Down	(m/ft)	1.81	5.93	1.79	1.9	6.23	1.55	5.09	1.68	5.5	1.8	5.9	1.94	6.4
Ⓗ Extension Deck	(m/ft)	0.9	3	0.9	0.9	3	0.9	3	0.9	3	0.9	3	0.9	3
Ⓘ Wheelbase	(m/ft)	1.35	4.4	1.85	1.85	6.08	1.85	6.08	1.85	6.08	1.85	6.08	2.22	7.28
Ground Clearance (Stowed/Raised)	(mm/in)	77/26	3.03/1	100/20	100/20	3.94/0.79	100/20	3.94/0.79	100/20	3.94/0.79	100/20	3.94/0.79	105/20	4.1/0.79
PRODUCTIVITY														
Max. Platform Occupants	(in/out)	2 / 1		2 / 1	2 / 1		2 / 1		2 / 1		2 / 1		2 / 1	
Platform Capacity	(kg/lbs)	230	510	380	230	510	450	990	320	705	320	705	320	705
Platform Capacity-Extension Deck	(kg/lbs)	120	265	120	120	265	120	265	120	265	120	265	120	265
Drive Height		Full Height												
Gradeability-Stowed	(%)	25		25	25		25		25		25		25	
Min. Turning Radius	(m/ft)	1.7	5.57	2.2	2.2	7.2	2.45	8.04	2.45	8.04	2.45	8.04	2.85	9.35
Raise/Lower Speed	(s)	16 / 28		30 / 34	31 / 40		35 / 40		58 / 48		65 / 60		80 / 65	
Brakes		Front-wheel Brake												
Drive Mode		4x2		4x2	4x2		4x2		4x2		4x2		4x2	
Tire Type		Solid Non-marking												
Tire Size	(mm/in)	323x100	12.7x3.9	380x130	380x130	15x5.1	380x130	15x5.1	380x130	15x5.1	380x130	15x5.1	380x130	15x5.1
POWER														
Power Source		24V DC 225Ah					24V DC 240Ah		24V DC 240Ah		24V DC 300Ah		24V DC 300Ah	
HYDRAULIC SYSTEM														
Hydraulic Oil Capacity	(L/gal)	9.5	2.1	13	13	3.4	16	4.2	23	6.1	23	6.1	25.5	6.7
WEIGHT														
Machine Weight(CE/ANSI)	(kg/lbs)	1610	3549	2040	2200	4850	2318	5110	2995	6603	2970	6548	3500	7716

STANDARD FEATURES

- Indoor and outdoor rated
- Proportional control
- Foldable guardrail
- Emergency stop device
- Manual brake release
- Emergency descent
- Swing-out component tray
- Pothole guard
- Self-lock entry gate
- Tilt alarm with lift cut-out
- Overload sensing system
- Descent alarm with flashing beacon
- All motions alarm
- Full-height drive
- Intelligent diagnostic system

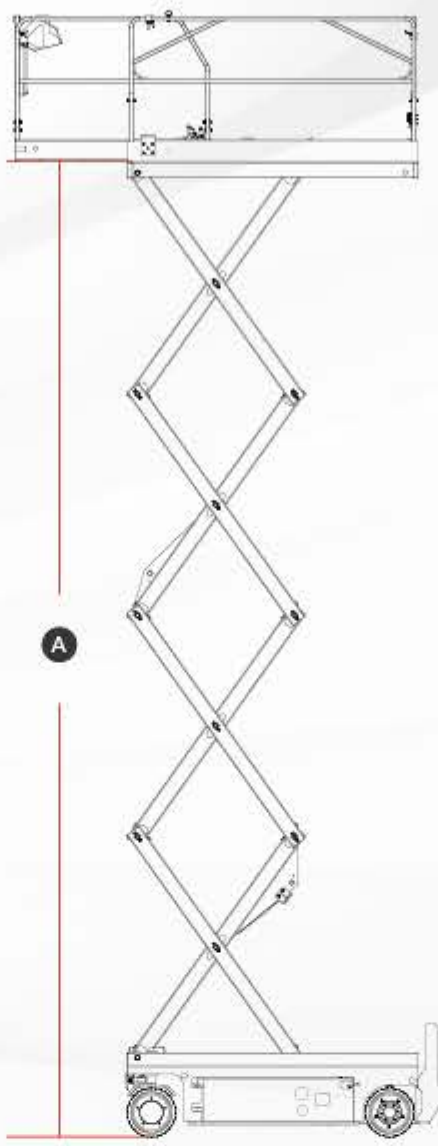

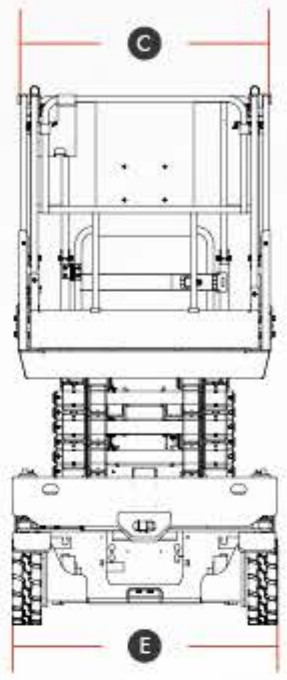

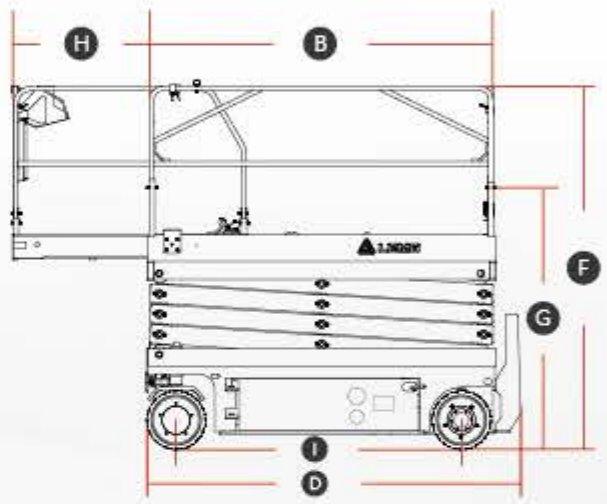

OPTIONAL

- AC power to platform
- Anti-entrapment protection
- Leak containment tray
- Maintenance-free battery
- Lithium battery
- Voice alarm system
- Telematics

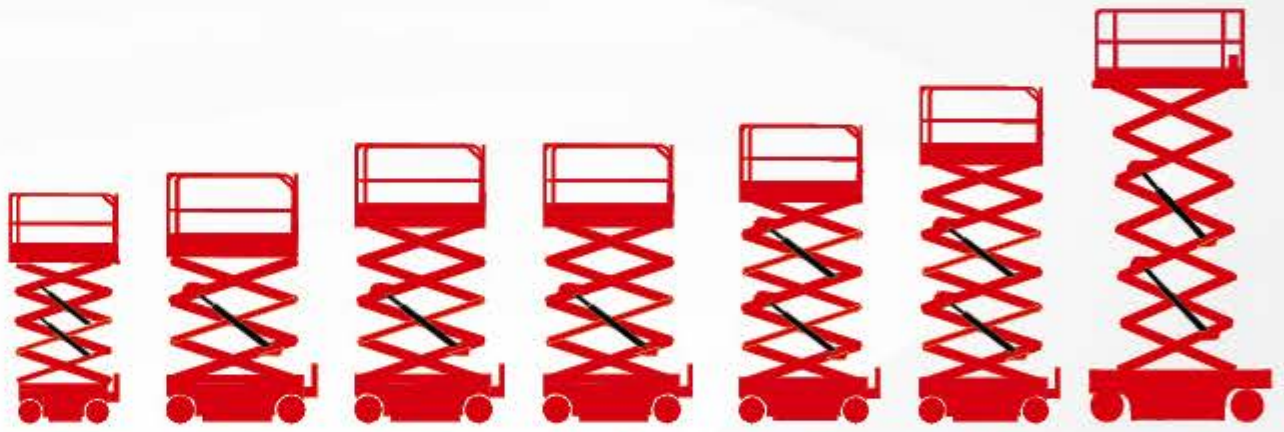

Please contact LGMG or a local dealer for more details。
LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.
This brochure comes into effect in March， 2022.

LINGONG HEAVY MACHINERY CO.， LTD.
Address: No. 2676, Kejia Road,Jinan, Shandong, China
Email: sales@lgmg.com.cn Tel:+86 531 6787 9283

LGMG Europe B.V.
Address: Laanweg 16 3208LC Spijkenisse Rotterdam, The Netherlands
Email: sales@lgmgeurope.com Tel:+31 850 642 777

LGMG North America Inc.
Address: 1445 Sheffler Dr, Chambersburg, PA. 17201,USA
Email: sales@lgmgna.com Tel:+1 833 288 5464

www.lgmglifts.com

LGMG
RELIABILITY IN ACTION